

**Kemo Electronic GmbH**

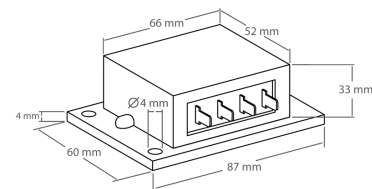
Mato Vukovic
 Leher Landstr. 20
 27607 Geestland
 Germany

Phone: +49 4743 9338-0
 Fax: +49 4743 9338-22

<http://www.kemo-electronic.de>
 email: info@kemo-electronic.de

HR.Nr. HRB 111 486
 UstNr: DE 814 380 369

M174 - Solar charging regulator Dual 16 A

**M174**

To be connected between a solar panel 12 V/DC and 1 or 2 batteries in order to avoid an overload of the batteries. If 2 batteries are connected, they are charged separately from each other. The battery with lowest charging voltage always receives more charging current. With LED displays and high charging capacity: max. 2 x 8 A or 1 x 16 A.

Important installation instructions, please note!

Technical Data:

Input voltage: solar panels 15 - 30 V/DC open circuit voltage, 12 V/DC rated voltage

Max. charging current: total 16 A (2 batteries of max. 8 A each or 1 battery connected in parallel at both outputs up to 16 A)

Connections: 1 or 2 batteries 12 V. If only one battery is connected then both outputs (1 + 2) in parallel (simultaneously) applied to the battery

Displays: one display per battery "battery is charging", 1 display: "all batteries charged".

Cooling: In case of currents > 4 A the module has to be screwed with the metal bottom on a heat sink with a surface of > 300 sq. cm.

Fuse: A pre-fuse F16 A is necessary (not included)

Switch-on voltage: battery approx. < 12,9 V/DC ($\pm 7\%$)

Switch-off voltage: "battery charged" ca. 14,2 V/DC ($\pm 7\%$)

Own current consumption (is taken from the battery): < 2 mA

Reverse current-proof (no additional diode required)

Dimensions: ca. 87 x 60 x 33 mm (with mounting bottom)

